


T4-E | SPECIFICATIONS

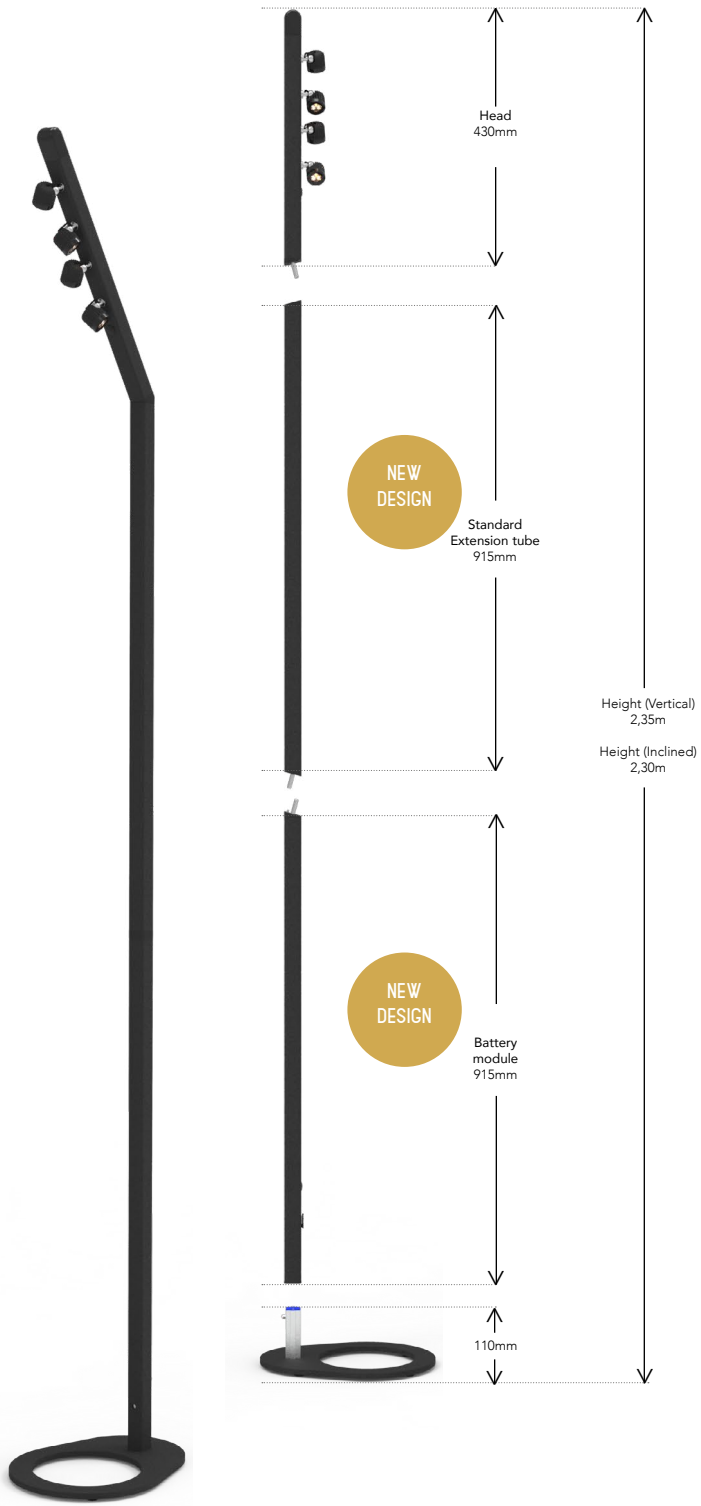

COMPOSITION

- 180° reversible head with 4 spotlights
- Vertical or inclined position
- Li-Ion battery module
- Extension module
- Base (open design)
(contact us for full base)

MATERIALS

- Extruded aluminium profile 6106T5
- AS13 Injected aluminium spotlight
- Hermalink® and Hermatwist® : injected polypropylene and stainless steel pins
- RF cap : injected 6-6 polyamide
- Steel base and ballast

FINISH

- Powder-coated epoxy paint
- Black RAL2100ST (textured) and White RAL9003 (fine texture)
(Contact us for colour customization)

DIMENSIONS

- Height (Vertical) : 2,35m
- Height (Inclined) : 2,30m

LED POWER & TECHNOLOGY

- 18W (4 x 4,5 W)
- LED Cree XPG3 HE

LIGHT INTENSITY

- Up to 2 000 lumens

COLOUR TEMPERATURE

- CCT Tunable white (3000K to 5600K)
- 3000K
- 4000K
- RGB

OPTICAL LENSES

- 26°

BATTERY

- Autonomy : 6 to 110h depending on the intensity setting
- Built-in charger
- Reconditioned Li-Ion 21700 Samsung cells
- 14.8V / 140Wh (2x70Wh) assembly
- Charging power supply : 100 / 240V AC 50-60Hz - 24V DC - 27,8W - 1,16A

TEMPERATURE RANGE

- 0°C to +40°C

NORMS

- Class III
- IP32 - IK08
- UN38.3 (ongoing)
- CE


WEIGHT

- 6,5 Kg

WARRANTY

- 2 ans on the product
- Extended to **18 months in normal use** on new Li-Ion battery

DIMMER/AUTONOMY

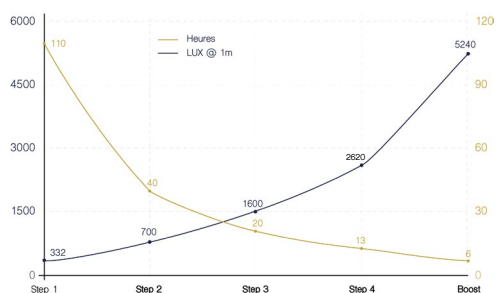

OPTIONS

LUMENRADIO®

Compatible CRMX protocole •

CRMX
by LumenRadio

NEW
FEATURE
2025 !



LED 3000K

- 3 LEDs 3000K per spotlight
- 13,5W (3 x 4,5 W)

LED 4000K

- 3 LEDs 4000K per spotlight •
- 13,5W (3 x 4,5 W) •



LED CCT (TUNABLE WHITE)

- 3 LEDs per spotlight : 3000K, 4000K, 5600K
- 13,5W (3 x 4,5 W)



LED HIGH-CRI

- CRI > 90 •




LED RGB

- 3 LEDs per spotlight : 1 x Red, 1 x Green, 1 x Blue

EXTRA BATTERY MODULE

- 14.8V Li-Ion battery with built-in charger •
- 140Wh : 2 x 70Wh internal modules •
- Reconditioned 21700 Samsung cells •
- **18-month warranty** •



NEW
DESIGN



NEW
DESIGN

TRANSPORTATION CASE

- Up to 3 T4 masts
- Pre-wired waterproof case with Powercon
- Space for 3 power supplies
- Dimensions : 1177 X 440 X 158 mm

STACK

- Up to 4 stackable T4 cases •
- Velcro® straps •
- On wheels •

